

Instructions: CSI Motorhome Cover

⚠ WARNING!

Installation must be done with two people.
Never install on a windy day or wet weather.
Please take care when you are on a ladder.

CAUTION

Cover or tape any sharp edges on your RV that could wear against your RV cover. Solar panels have sharp edges so always ensure that these corners are protected.

Your cover will fit over flexible or flat antennas AC units, and satellite dishes. Always protect any sharp areas to allow a long life span of your cover.


The following instructions are a guide line on how to apply your cover easily without having to climb on top of the vehicle. By following the instructions below you will not have to lift the cover up on a ladder.

Tools Needed:


1. Step ladder
2. Small rope twine 5m
3. Roll of tape to protect any sharp areas
4. Wooden pole

Installation

1. Layout the cover flat on the ground and ensure all the zips are unzipped (the cover is clearly labelled "Front" on the inside hem) (Fig. 1).

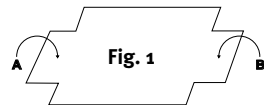


2. Roll your cover from the front to the centre in a tight tube form (Fig. 2).




Once in the centre start on the other end and roll that half to the centre. Now you have a long roll of cover. Be sure to note which end is "Front".

Tie a rope on to the end of the roll and throw this over the middle of the vehicle.

3. One person will pull the roll over with the rope and the other help feed the cover over the top (Fig. 3).


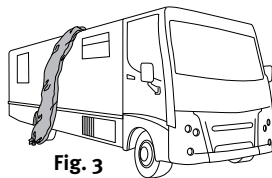


4. With the cover draped over the middle of the roof of vehicle use a step ladder to unfurl the cover from either side towards the front and back of the vehicle. The cover may catch on antennas or air conditioning units so use a small pole to lift it over any obstacle it may catch on (Fig. 4).

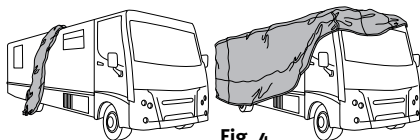

5. The cover is now pulled down over the front and back of the vehicle.



6. Your cover is equipped with triple zipper pulls on the front side panels (Fig. 5). These extra zipper pulls allow the cover to fit RVs with mirrors that do not fold against the RV. Zip all three zipper pulls down to the mirror height,



then zip the bottom zipper to the bottom of the cover. Create an opening at the mirror height by zipping the top zipper up slightly and the center zipper down slightly. Slip the opening over the mirror and close the top and bottom zippers around the mirror post. Finish by zipping all the panels closed on your cover then pull the elasticized corners down over both bumpers of your RV.

7. Finish by zipping all the panels closed on your cover then pull the elasticized corners down over both bumpers of your RV.


8. Included with your cover is a toss bag to help you attach the straps under your RV. Clip the toss bag to the buckle strap attached to the tension panel (Fig. 6). Now toss the bag under your RV to the buckle on the opposite side (Fig. 7). Unclip the strap from the bag and buckle the bag to the next strap. Repeat with the remaining straps.

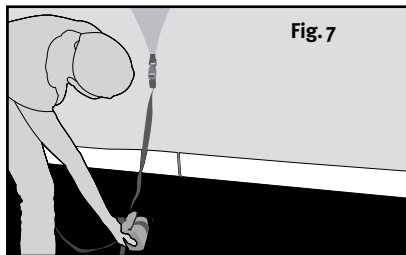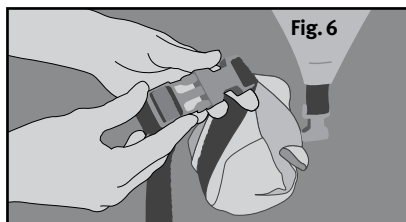

9. Adjust the strap length on the tension panels across the front and back to fit your RV. Don't over tighten—the straps should be snug, not drum tight.


The sides of your cover can be unzipped for access to the door and engine. The panels can be rolled up and held in place with the rip-and-grip straps toward the top of each panel

Your cover is equipped with extra long zipper pulls. To secure the zipper pulls so that they do not drag on the ground bring the ends of the zipper pulls up and tuck them into the rip-and-grip closure located at the base of the zipper along the hem (Fig. 8).

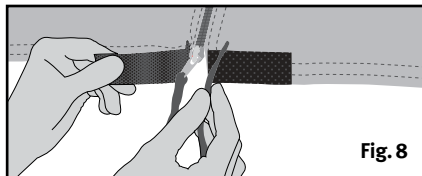


Use and Storage

A handy storage bag is provided. Attached to the storage bag are tension panels you can tighten to further secure your bag. To fit it in the bag fold your cover and roll the cover tightly rather than stuffing it. Lay your cover out on the ground on a clean surface with the inside down. Begin folding each side over beginning with (A) first then the back panel (B) (Fig. 9).

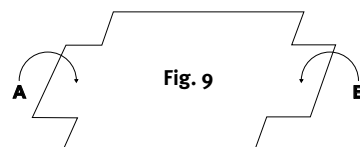

Roll your cover into a cylinder and pack it into the stuff sack (Fig. 10). Tighten the tension panels for a snug fit. Never store a wet cover in the storage bag or confined area as the cover can be damaged by mildew.

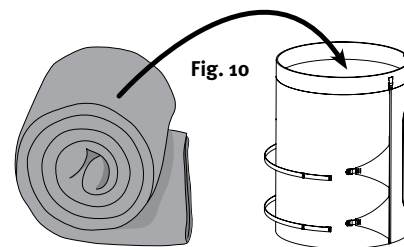

Care

Spot clean with water, a mild soap and a sponge. Don't use abrasive cleaners or brushes.

Two Year Limited Warranty

If this cover fails due to a defect in workmanship and materials within two years from the date of purchase Cover Systems will repair or replace it free of charge.

Trailing or towing your RV with your Cover on will invalidate the warranty.



"Innovators in protecting your domestic and commercial assets"