


COVER SYSTEMS INTERNATIONAL BIMINI TOP INSTALLATION GUIDE



Unpack the carton, you can find the parts as below:

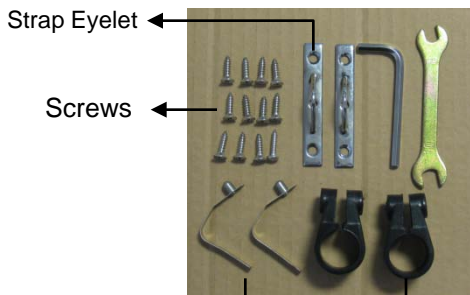

Strap Eyelet

Screws

Spring Pin

Mini Clamp

(The spring pins and mini clamps are free extra spares)



Cover

Strap



Mount Bracket



Connecting Bow

Main Bow

Middle Bow


Rear Support Leg

Front Bow

Mini Clamp


Here are the basic steps to install your new bimini top.

Step #1: Assembling the bows

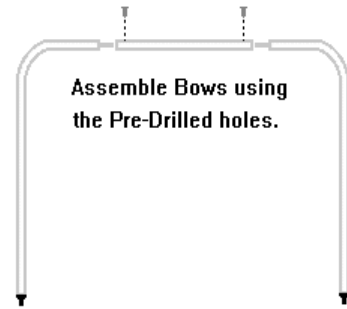


Step #2: Insert all ends of bows into the mini clamps on main bows, secure with screws. All mini clamps are positioned well before delivery, please don't move it at this stage.

Attach the 2 rear support leg onto the main bow as shown in the right picture.

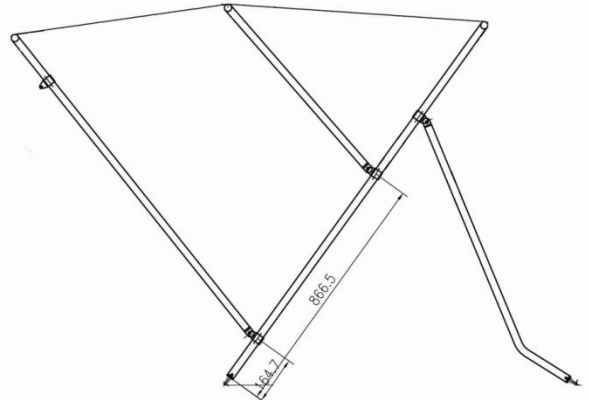

Step #3: Install the top onto the bimini bows, the zipper can help you do this job very quickly.

Step #4: Install the straps onto the mini clamp on the front bows. Now the bimini is ready to attach to Your Boat

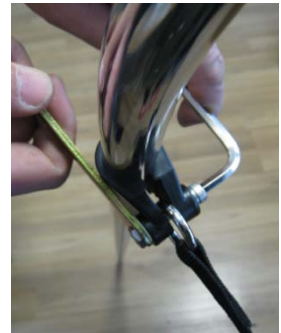

Step #5: Find Desired Location on the Boat

Pick up the assembled bimini top and hold in place at desired mounting location on your boat. Extend the top to its fully open position and place a pencil mark on your boat at the location where the largest bow will be anchored to the boat. Place a corresponding pencil mark on the other side of the boat. These are where your mounting brackets will be placed. Be sure that the 2 mounting points are the same distance from either the bow or the stern.

Step #6: Mark Holes for Bimini Brackets

Place a mounting bracket at the appropriate location and outline it with a pencil. Also mark the boat through the screw holes in the bracket.

Please move the black nylon bush to find the screw holes.



Step #7: Drill Holes for Bimini Bracket

Using a drill with a bit **smaller** than the actual screws provided, drill the 2 holes needed to secure the bracket to your boat.

Step #8: Secure Bracket with Screws

Place the bracket in place and secure firmly to your boat. Repeat the process for the other side of the boat.

Step #9: Install the supplied 4 ball joints on the end of bimini top main bow and rear support leg, and push the ball into the bracket, then fix the ball in position with screws.



Step #10: Attach The Strap Eyelets

Position the forward attaching eyes to the boat and drill the holes needed to secure them to the boat. The forward strap eyes should be mounted at a position that places the straps at a minimum 45 degree angle as they will take most of strain when you are "under way". Set the back eyes for the rear straps. Tighten the strap and adjust the small clamps on the main bow, now you get the best top you want!



Note: Please use the boot to protect the fabric when not using the bimini top.

